

EBP 105 EU

EBUS BUTTON PANEL - FLEX55 AND EU WALL FRAME

- ▶ Fully customizable button panel integrates easily with an Extron Pro Series control system
- ▶ Compatible with Flex55 modules, mounting kits, and enclosures or EU junction boxes
- ▶ Five backlit, soft-touch buttons that can be customized using Extron's Custom Button Builder
- ▶ Two eBUS ports allow for quick system expansion and upgrades
- ▶ Use a single button panel or combine multiple button panels to accommodate a broad variety of system designs
- ▶ DIP switches are used to set unique eBUS device addresses and minimize setup time
- ▶ Includes black and white EU wall frames and mounting brackets



The Extron EBP 105 EU eBUS® Button Panel is a fully-customizable AV system control interface designed for use with Extron eBUS-enabled control systems. This easy-to-use control panel connects to an IPCP Pro control processor to perform a wide variety of AV system functions. Five backlit, soft-touch buttons provide easy operation in low-light environments. eBUS button panels are linked to the control processor and to each other using a single cable that carries both power and communication.



Extron Electronics
INTERFACING, SWITCHING AND CONTROL

DESCRIPTION


eBUS button panels connect using a unique digital bus architecture that allows for easy control system expansion, greater design options, and future upgrades. Button panels are linked to the control processor and to each other using a single cable that carries both power and communication. This efficient, expandable design allows a button panel to be used as a single user interface in a smaller system or combined with other button panels and touchpanels when a more elaborate control system is required.

Since eBUS button panels have the same physical appearance as Extron's broad range of MediaLink controllers, they can be used alongside them throughout a facility while preserving a consistent look and user experience. Button panels are available with five to ten buttons with convenient button arrangements to suit a broad range of room control needs. Buttons can be easily customized using the online Custom Button Builder application.

FEATURES

- ▶ Fully customizable button panel integrates easily with an Extron Pro Series control system
- ▶ Compatible with Flex55 modules, mounting kits, and enclosures or EU junction boxes
- ▶ Five backlit, soft-touch buttons that can be customized using Extron's Custom Button Builder
- ▶ Two eBUS ports allow for quick system expansion and upgrades
- ▶ Use a single button panel or combine multiple button panels to accommodate a broad variety of system designs

APPLICATION DIAGRAM

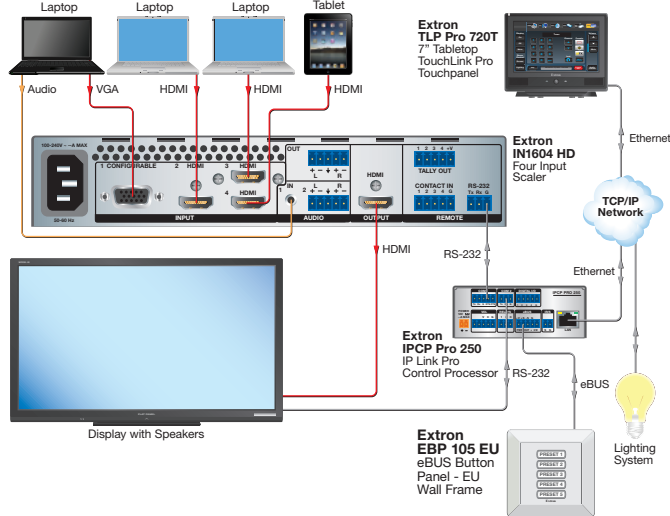

SPECIFICATIONS

EBUS CONTROL INTERFACE		
eBUS control ports	(2) 3.5 mm captive screw connectors, 4 pole	
eBUS pin configuration	+V = +12 VDC; +S = + signal; -S = - signal; G = ground	
Recommended cable type	Extron STP20-2/1000 or STP20-2P/1000 cable	
Maximum system cable length	1000 feet (305 meters) sum total for the eBUS system, regardless of topology. Power injection may be required depending on system cabling topology and primary power supply wattage. See the eBUS® Button Panel EU and MK Series Setup Guide or eBUS Technology Reference Guide for details.	
SOFTWARE AND CONTROL OPTIONS		
Configuration software	Global Configurator Plus and Professional	
Programming software	Global scripiter	
Control apps	Extron Control	
Utilities	Toolbelt	
GENERAL		
Power	12 VDC (Power is supplied by an Extron IPOCP Pro series control processor or optional power supply).	
Power consumption	1.5 W	
Thermal dissipation	4.4 BTU/hr	
Enclosure dimensions		
Faceplate	3.2" H x 3.2" W x 0.5" D (8.1 cm H x 8.1 cm W x 1.3 cm D) (Depth includes faceplate and buttons.)	
Device	2.2" H x 2.2" W x 1.1" D (5.5 cm H x 5.5 cm W x 2.9 cm D) 2.2" H x 2.2" W x 1.6" D (5.5 cm H x 5.5 cm W x 4.0 cm D) including captive screw connectors (Depth includes faceplate and buttons. Allow at least 1.14" [2.90 cm] depth in the wall or furniture for cables.)	
Product weight	0.2 lb (0.1 kg)	
Regulatory compliance		
Safety	CE, c-UL, UL	
EMI/EMC	CE, C-Tick, FCC Class A, ICES, VCCI class A	
Environmental	Complies with the appropriate requirements of RoHS, WEEE	
Accessibility	Complies with the appropriate requirements of Section 508 of the Rehabilitation Act (29 U.S.C. 794d).	
Warranty	3 years parts and labor	
Model	Version Description	Part number
EBP 105 EU	Flex55 and EU, Black and White, 5 Button	60-1085-31
Optional Accessories	Version Description	Part number
Model		
EBDB	10 eBUS Ports	60-1170-01
PS 1220EB	Power and Six eBUS Ports	70-988-01
STP 20-2P/1000	Plenum 1000' (305 m) Spool	22-163-03
STP 20-2/1000	Non Plenum 1000' (305 m) Spool	22-161-03
PS 910 C	9V, 1A, Captive Screw Connector	70-774-01
UCM 100	Black	70-903-02
Flex55 100 Mounting Kit Series	Various	Various
EWB 212	External Wall Box for Flex55 and EU products	70-1131-12
SMB 210 Series	Low Profile Surface Mount Boxes for Extron Flex55 and EU products	Various

For complete specifications, please go to www.extron.com
Specifications are subject to change without notice.

WORLDWIDE SALES OFFICES

Anaheim • Raleigh • Silicon Valley • Dallas • New York • Washington, DC • Toronto • Mexico City • Paris • London • Frankfurt
Madrid • Stockholm • Amersfoort • Moscow • Dubai • Johannesburg • Tel Aviv • Sydney • Melbourne
New Delhi • Bangalore • Singapore • Seoul • Shanghai • Beijing • Hong Kong • Tokyo

www.extron.com