

Specifications

CCI Pro 700

Display

Screen type	Active matrix TFT color display
Size	3.5" (8.9 cm), measured diagonally
Resolution.....	320x240
Dot/pixel pitch.....	114 dpi
Aspect ratio	Standard
Color depth.....	24 bit
Brightness	300 nits (cd/m ²)
Contrast.....	350:1
Backlight.....	LED
Viewing angle.....	±60° Horizontal, +60° vertical

Memory

SDRAM.....	512 MB
Flash.....	512 MB

Communication – Ethernet interface

Ethernet control/communications port	1 female RJ-45 connector
Ethernet data rate	10/100Base-T, half/full duplex with autodetect
Ethernet protocol	DHCP, DNS, HTTP, HTTPS, ICMP, SFTP, SSH, TCP/IP, UDP/IP
Default settings	Link speed and duplex level: autodetected IP address = 192.168.254.251 Subnet mask = 255.255.255.0 Default gateway = 0.0.0.0 DHCP = off DNS = 127.0.0.1
Program control.....	Extron Global Configurator Plus and Professional for Windows® Extron GUI Designer for Windows® Toolbelt

Communication – interface


Motion sensor	On/off
Light sensor	On/off
External buttons.....	30 backlit, 6 customizable, 4 context-dependent buttons

Audio output

Speaker output	2 mono, 86 dB SPL, 0.1 watt, 0.1 m, half space
Frequency response	750 Hz to 20 kHz, ±5 dB
Playback format(s)	
Container format	WAV (Microsoft RIFF)
Encoding	LPCM (uncompressed)
Bit depth	Unsigned 8-bit, signed 16-bit, signed 24-bit, signed 32-bit
Sampling rate	2 kHz to 192 kHz
Audio channels.....	Mono

General

Power supply	Not included
Power input requirements	Power over Ethernet (PoE 802.3af, class 3)
Power consumption — Power injector (XTP PI 100)	
Device	8.4 watts
Device and power injector	10.7 watts
Temperature/humidity	Storage: -4 to +140 °F (-20 to +60 °C) / 10% to 90%, noncondensing Operating: +32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing
Cooling	Convection, no vents
Thermal dissipation — Power injector (XTP PI 100)	
Device	28.6 BTU/hr
Device and power injector	36.3 BTU/hr
Mounting	
Furniture or wall mount	Set on tabletop
Enclosure type	Plastic
Enclosure dimensions	3.45" H x 7.87" W x 6.75" D (8.9 cm H x 20.1 cm W x 17.3 cm D) (Includes base)

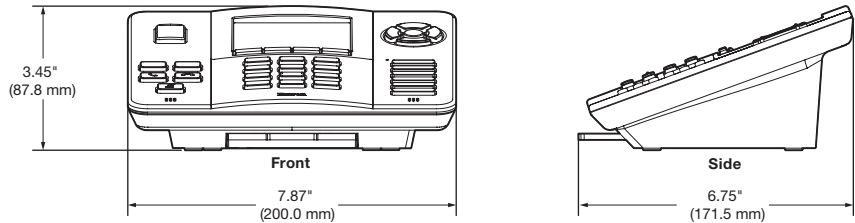

Product weight	2.5 lbs (1.1 kg)
Shipping weight	4 lbs (2 kg)
Vibration	ISTA 1A in carton (International Safe Transit Association)
Regulatory compliance	
Safety	CE, c-UL, UL
EMI/EMC	CE, C-tick, FCC Class A, ICES, VCCI
Environmental	Complies with the appropriate requirements of RoHS, WEEE.
Warranty	3 years parts and labor

NOTE: All nominal levels are at $\pm 10\%$.

NOTE: Specifications are subject to change without notice.

8.1-081815-D2