


Specifications — DisplayPort AAP with Pigtail

Performance/electrical

Standards.....	DisplayPort 1.1a
Data rate	Supports up to 10.8 Gbps
Maximum resolution	2560x1600 @ 60 Hz
Vertical frequency.....	Supports up to 60 Hz
Temperature rating	75 °C
Voltage	30 V
Pair impedance.....	100 ohms ±10 ohms
Attenuation	At 0.825 GHz: <8 dB per 10 m

General

Mounting	
Rack mount	Yes, with optional mounting frame or Extron device with AAP openings
Furniture or wall mount..	Yes, with optional mounting frame or Extron device with AAP openings
Enclosure type	Metal
Connector type	1 female DisplayPort to 1 female DisplayPort on a pigtail cable
Enclosure dimensions	
Faceplate.....	0.7" H x 3.5" W x 0.1" D (single space AAP plate) (1.8 cm H x 8.9 cm W x 0.3 cm D)
Enclosure/connector	0.5" H x 1.3" W x 13.3" L (1.2 cm H x 3.3 cm W x 33.8 cm L) (Length excludes front screws but includes connectors and cable.) Allow at least 2.4" (6.1 cm) depth for connector and cable bend radius.

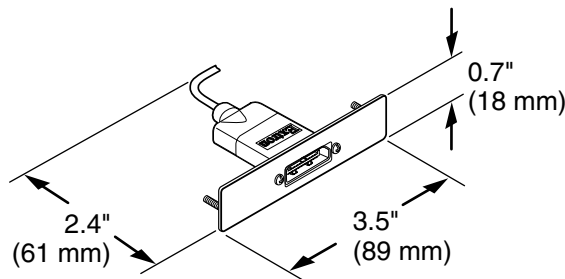

DisplayPort AAP

Product weight	0.2 lb (<0.1 kg)
Shipping weight	1 lb (1 kg)
Vibration.....	ISTA 1A in carton (International Safe Transit Association)
Regulatory compliance	
Safety.....	UL CL2
Environmental	Complies with the appropriate requirements of RoHS
Warranty	3 years parts and labor

NOTE Specifications are subject to change without notice.

7.6-031510-D3