

# Specifications — DisplayPort MAAP with Pigtail

## Performance/electrical

Standards.....	DisplayPort 1.1a
Data rate .....	Supports up to 10.8 Gbps
Maximum resolution .....	2560x1600 @ 60 Hz
Vertical frequency.....	Supports up to 60 Hz
Temperature rating .....	75 °C
Voltage .....	30 V
Pair impedance.....	100 ohms ±10 ohms
Attenuation .....	At 0.825 GHz: <8 dB per 10 m

## General

### Mounting


Rack mount .....	Yes, with optional mounting frame or Extron device with MAAP openings
Furniture or wall mount...	Yes, with optional mounting frame or Extron device with MAAP openings

Enclosure type .....

Connector type .....

### Enclosure dimensions

Faceplate.....	0.7" H x 2.2" W x 0.1" D (single space MAAP plate) (1.8 cm H x 5.6 cm W x 0.3 cm D)
Enclosure/connector .....	0.5" H x 1.3" W x 13.3" L (1.2 cm H x 3.3 cm W x 33.8 cm L) (Length excludes front screws but includes connectors and cable.) Allow at least 2.4" (6.1 cm) depth for connector and cable bend radius.

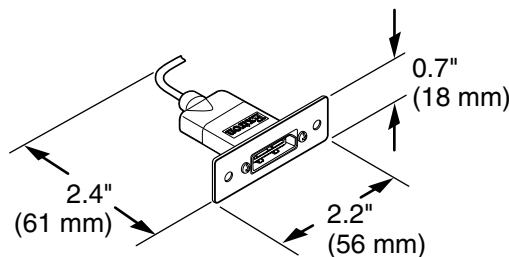

## DisplayPort MAAP

Product weight .....	0.2 lb (<0.1 kg)
Shipping weight.....	1 lb (1 kg)
Vibration.....	ISTA 1A in carton (International Safe Transit Association)
Regulatory compliance	
Safety.....	UL CL2
Environmental .....	Complies with the appropriate requirements of RoHS
Warranty .....	3 years parts and labor

**NOTE** Specifications are subject to change without notice.

7.6-031510-D3