

Specifications

FF 220T

Audio/acoustic and electrical

Speaker type	1-way, full-range, in-ceiling speaker
Frequency range.....	68 Hz to 18 kHz, -10 dB, half space
Power capacity	16 W (rms) continuous pink noise 32 W (rms) continuous program
Nominal sensitivity.....	86 dB SPL, 1 watt, 1 m, half space
Nominal coverage angle.....	170° conical coverage
Nominal impedance	8 ohms per speaker
Driver	(1) 3" (76.2 mm) paper cone
Input connector.....	(1) 10 mm Euro-style captive screw terminal block, 7 pole
Tap settings	
70 V input	16 W, 8 W, 4 W, 2 W, 1 W, null (bypass 8 ohm direct connection)
100 V input	Null, 16 W, 8 W, 4 W, 2 W, 1 W (bypass 8 ohm direct connection)

General


Package	2 speakers (1 pair) with 2' (61 cm) cross bars
Temperature/humidity	Storage: -40 to +158 °F (-40 to +70 °C) / 10% to 90%, noncondensing Operating: +32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing
Mounting	
US version	Drops into 2' x 2' (61 cm x 61 cm) or 2' x 4' (61 cm x 122 cm) suspended tile ceilings
Metric version.....	Drops into 600 mm x 600 mm or 600 mm x 1200 mm suspended tile ceilings
Enclosure type.....	Composite, square, with metal grille
Enclosure outer dimensions	
US version (2' x 2').....	3.25" H x 23.75" W x 23.75" L (8.3 cm H x 60.3 cm W x 60.3 cm L)
Metric version (600 mm x 600 mm)	3.25" H x 23.4" W x 23.4" L (8.3 cm H x 59.4 cm W x 59.4 cm L)
Product weight.....	Single: 7.8 lbs (3.5 kg)
Shipping weight.....	Pair: 21 lbs (10 kg) with mounting kit
Vibration	ISTA 1A in carton (International Safe Transit Association)
Regulatory compliance	
Safety	CE, NFPA90A, NFPA70; UL Listed for use in plenum airspaces: meets UL 2043 for heat and smoke release, meets UL 1480 for commercial and professional audio systems
Environmental.....	Complies with the appropriate requirements of RoHS, and WEEE.
Warranty.....	5 years parts and labor

NOTE: All nominal levels are at $\pm 10\%$.


NOTE: Specifications are subject to change without notice.

FF 220T RESPONSE GRAPHS – FREQUENCY AND IMPEDANCE


SPL vs. FREQUENCY – 1 WATT @ 1 METER RESPONSE, HALF SPACE (2π)

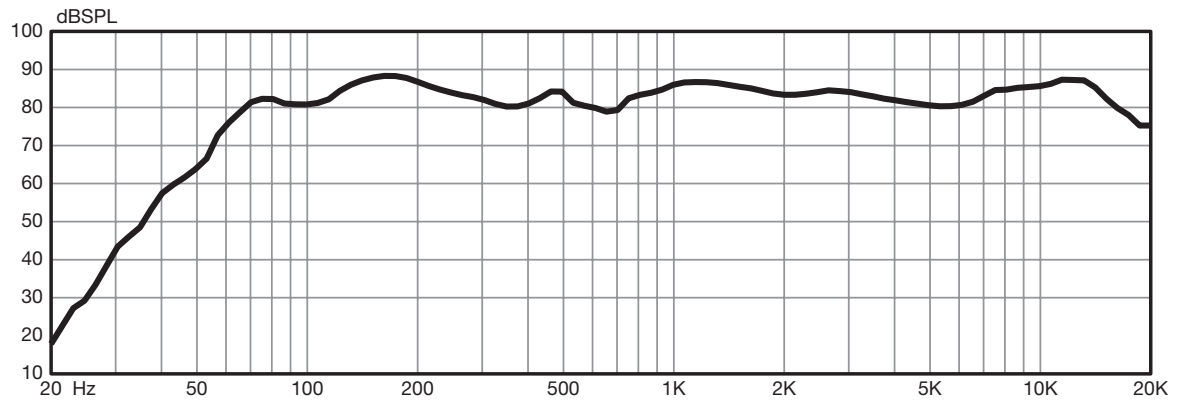







SPL vs. FREQUENCY – HORIZONTAL OFF-AXIS RESPONSE, HALF SPACE (2π)

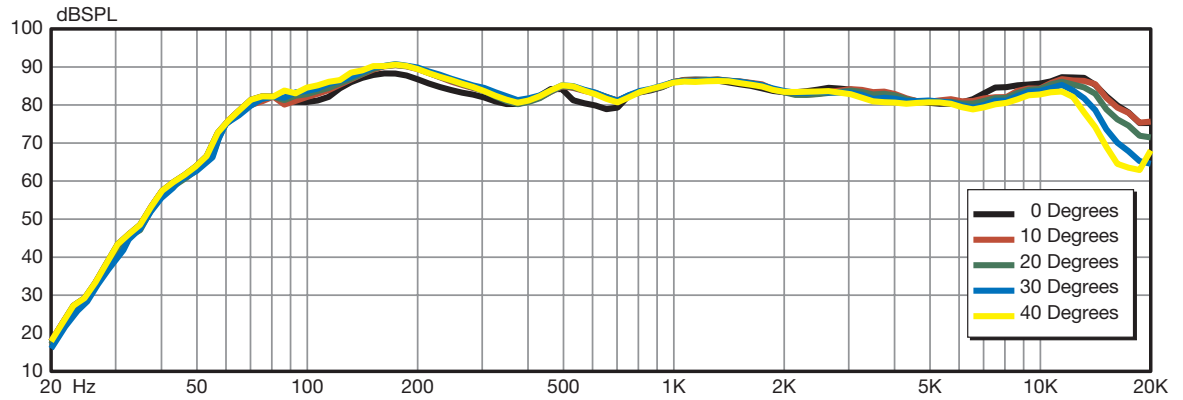

IMPEDANCE vs. FREQUENCY

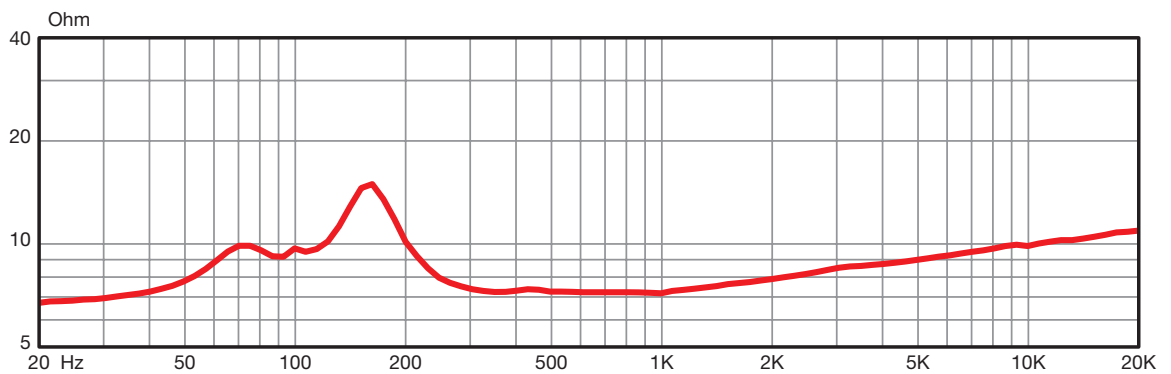

FF 220T POLAR GRAPHS – 1/3 OCTAVE, HORIZONTAL

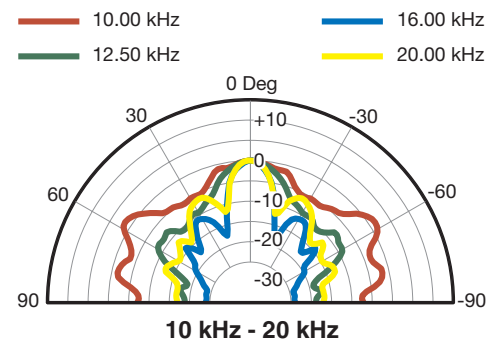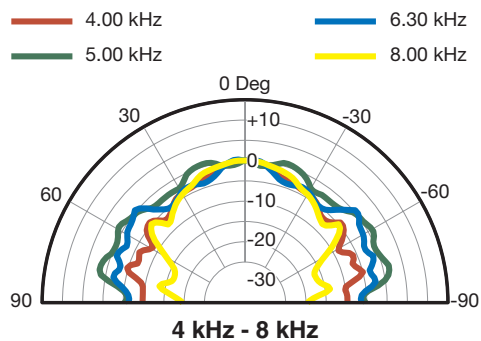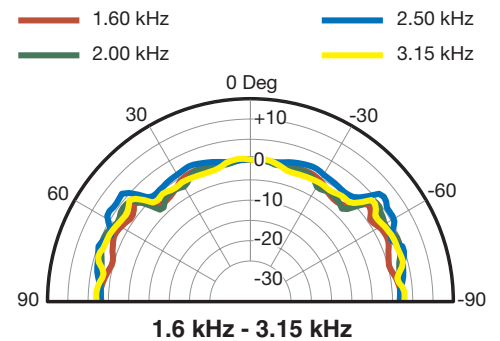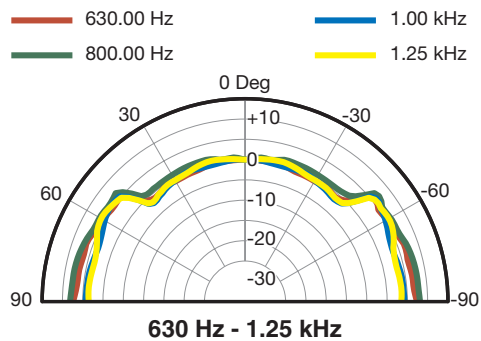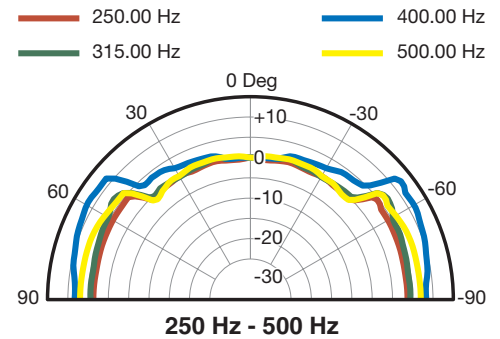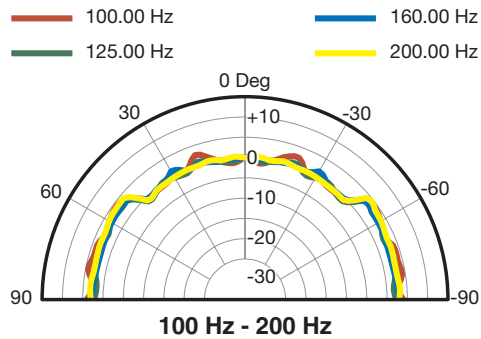

8.0-060713-D3