

Specifications

Quick LC MM and Quick LC SM


NOTE: Use the Quick LC MM Connector with Extron OM4 MM P cable.
Use the Quick LC SM Connector with Extron SM P cable.

Performance — optical

Fiber core diameter	
Quick LC MM	Multimode: 50 μ m
Quick LC SM.....	Singlemode: 8.3 μ m
Insertion loss	
Quick LC MM	Nominal: 0.1 dB Maximum: 0.5 dB
Quick LC SM.....	Nominal: 0.2 dB Maximum: 0.5 dB
Standards.....	Performance: TIA/EIA 568 FOCIS (connector interface): TIA/EIA 604

General — physical characteristics

Connector type	LC
Connector dimensions.....	2.11" L* x 0.18" W x 0.18" H (53.6 mm L* x 4.47 mm W x 4.47 mm H) (*Dimensions exclude the boot length.)

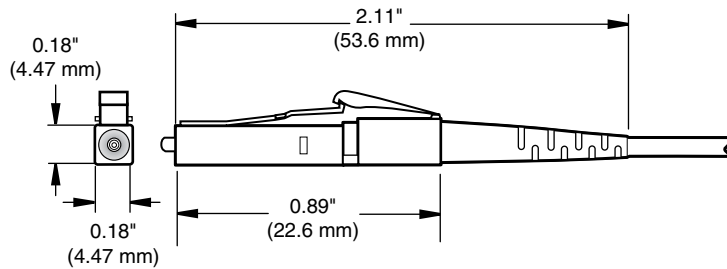

Cable diameters	3.0 mm, 2.0 mm, 900 μ m, 250 μ m
Temperature rating.....	-40 °C to +75 °C

NOTE: Specifications are subject to change without notice.

8.0-042611-D2