

Specifications — USB Female to Female on Pigtail Cables AAP Series

Performance/electrical

Standards..... USB 2.0

General

Mounting

Rack mount..... Yes, with optional mounting frame or Extron device with AAP openings

Furniture or wall mount... Yes, with optional mounting frame or Extron device with AAP openings


Enclosure type Metal

Connector type 1 female USB B to 1 female USB A on a pigtail cable or
2 female USB A to 2 female USB B on a pigtail cable or
2 female USB A to 2 female USB A on a pigtail cable, depending on model


Enclosure dimensions

Faceplate..... 0.7" H x 3.5" W x 0.1" D (single space AAP plate)
(1.8 cm H x 8.9 cm W x 0.3 cm D)

Enclosure/connector 0.6" H x 0.7" W x 12.3" ±0.5" L
(1.5 cm H x 1.8 cm W x 31.3 cm ±1.3 cm L)
(Length excludes front screws but includes connectors and cable.)
Allow at least 1.6" (4.0 cm) depth for connector and cable bend radius.

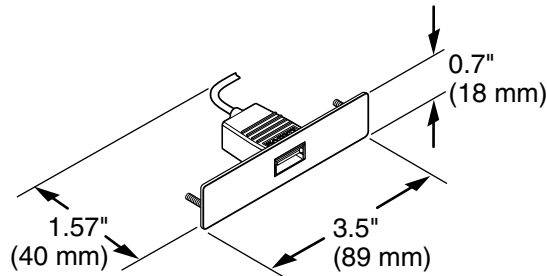

USB A

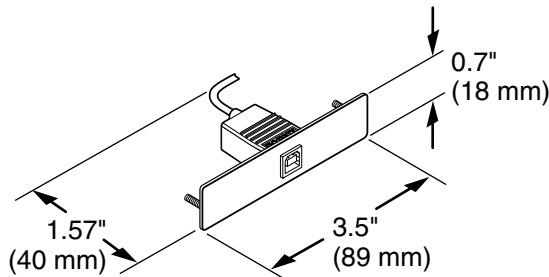

USB B

CAUTION Do not bend cable beyond the recommended depth.

Product weight <0.1 lb (<0.1 kg)

Shipping weight 1 lb (1 kg)

Vibration..... ISTA 1A in carton (International Safe Transit Association)

Regulatory compliance

Environmental..... Complies with the appropriate requirements of RoHS

Warranty 3 years parts and labor

NOTE Specifications are subject to change without notice.

7.6-031510-D6