



Specifications

AC+USB 200 Power Module Series for Cable Cubby Series/2

General

Power output

AC (US model).....	125 VAC, 50-60 Hz, 12A max total
AC (non-US models).....	240 VAC, 50-60 Hz, 10A max total
USB (US model)	5 VDC, 4.0 A, 20 watts total; Type A connector
USB (non-US models)	5 VDC, 2.1 A, 10.5 watts total; Type A connector

USB power supply

(non-US models)	External
	Input: 100-240 VAC, 50-60Hz
	Output: 12 VDC, 1 A

USB power consumption

US model	24.4 watts
Non-US models.....	13.2 watts

Temperature/humidity Storage: -40 to +158 °F (-40 to +70 °C) / 10% to 90%, noncondensing
 Operating: +32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing

Cooling Convection, no vents

USB thermal dissipation

US model

Device and internal power supply	18.5 BTU/hr
---	-------------

Non-US models

Device	2.7 BTU/hr
Device and power supply...	10.7 BTU/hr

Mounting Mountable into select Cable Cubby enclosures

Enclosure dimensions

US model	2.40" H x 4.20" W x 4.00" D (61 mm H x 107 mm W x 102 mm D)
----------------	--


For US AC cord models: Allow an additional 2.50" (64 mm) depth to account for the attached AC power cord bend radius.

For US AC conduit model: Allow an additional 5.00" (127 mm) depth to account for the attached flexible conduit bend radius.

Non-US models.....	2.40" H x 4.20" W x 2.62" D (61 mm H x 107 mm W x 66 mm D)
--------------------	---

For non-US AC cord models: Total allowable depth is dependent upon the detachable AC power cord being used. Cable bend radius can vary.

Specification • AC+USB 200 Power Module Series for Cable Cubby Series/2

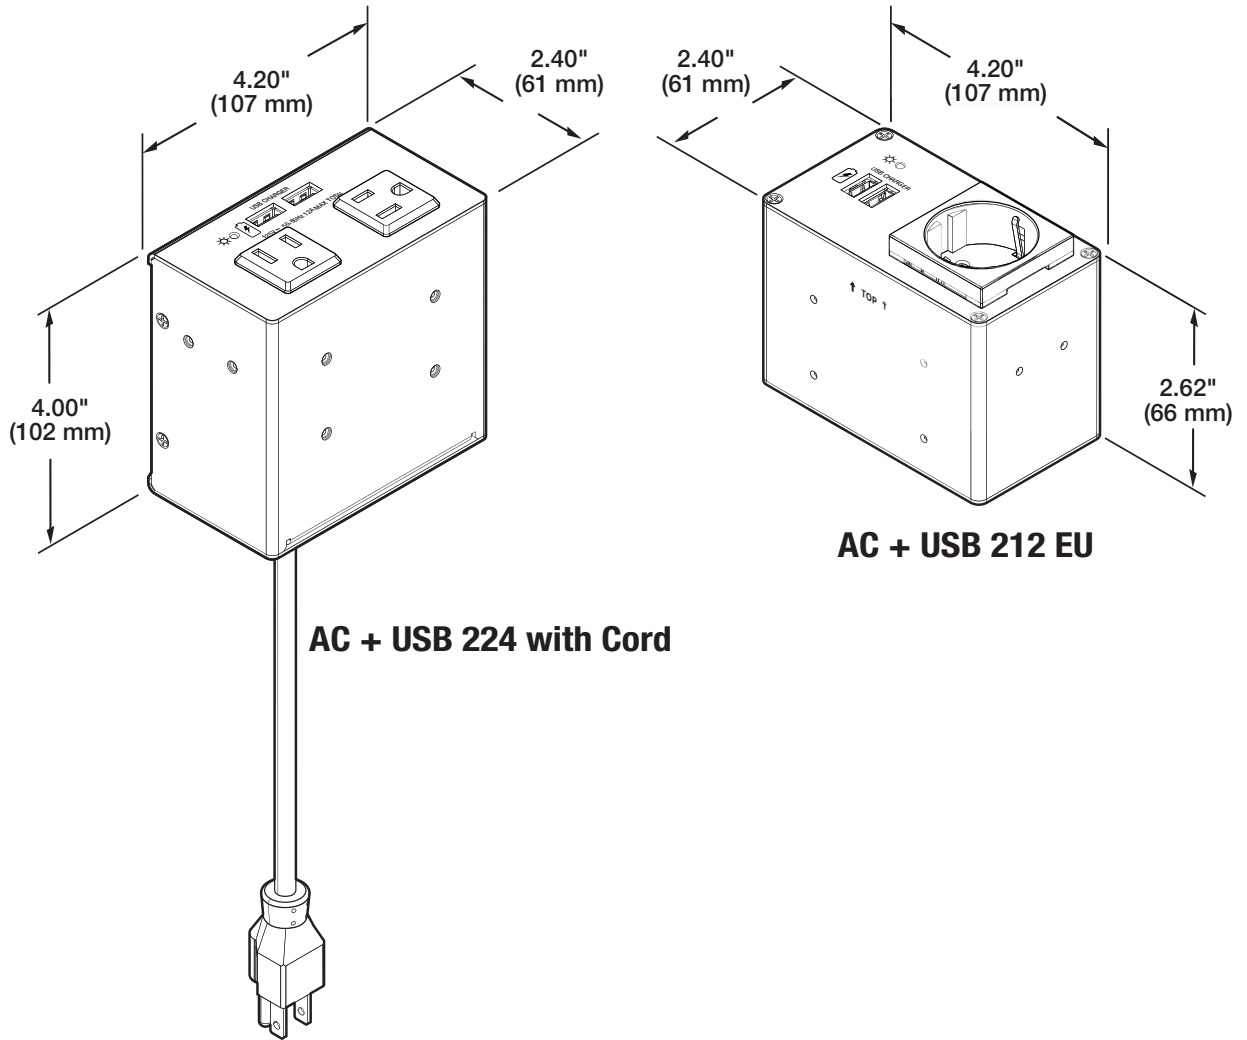

Material	Cold-rolled steel (face panel), extruded aluminum (body)
Product weight	
US AC cord model	2.5 lbs (1.1 kg)
US AC conduit model	2.4 lbs (1.1 kg)
Non-US models	2.2 lbs (1.0 kg)
Vibration	ISTA 1A in carton (International Safe Transit Association)
Regulatory compliance	
US models	UL, c-UL
Environmental	Complies with CE Mark in accordance to the appropriate requirements of RoHS, WEEE
Warranty	3 years parts and labor

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.

4108-D6