

Specifications

AC+USB 300 Power Module Series for Cable Cubby Series/2

General

Power output

AC (US model)..... 125 VAC. 50-60 Hz, 12 A max total

USB (US model)

Type A 5 VDC @ up to 2 A, 10 watts max

Type C 5 VDC @ up to 3 A, 9 VDC @ up to 3 A, 12 VDC @ up to 3 A, 15 VDC @ up to 3 A or 20 VDC @ up to 2.25 A. 45 watts max.

USB power consumption

US model 63.7 watts

Temperature/humidity Storage: -40 to +158 °F (-40 to +70 °C) / 10% to 90%, noncondensing
Operating: +32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing

Cooling Convection, no vents

USB thermal dissipation

US model


Device and internal power supply
29.6 BTU/hr

Mounting Mountable into select Cable Cubby enclosures

Enclosure dimensions

US model 2.40" H x 4.20" W x 6.00" D
(61 mm H x 107 mm W x 152 mm D)
For US AC cord models: Allow an additional 1.00" (25 mm) depth to account for the attached AC power cord bend radius.
For US AC conduit model: Allow an additional 5.00" (127 mm) depth to account for the attached flexible conduit bend radius.

Specification • AC+USB 300 Power Module Series for Cable Cubby Series/2 (Continued)

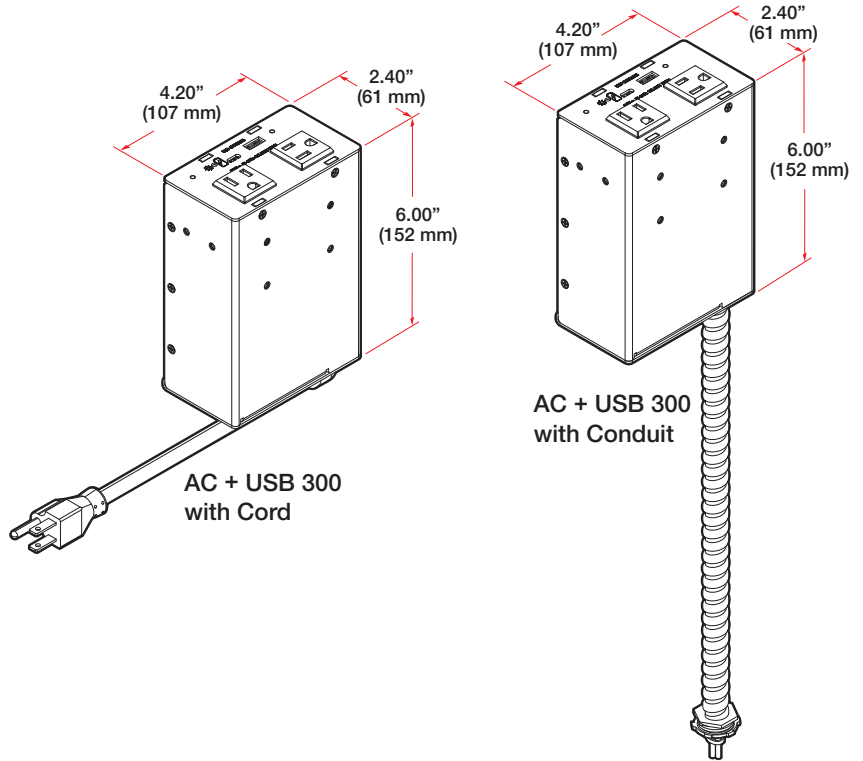

Material.....	Aluminum body
Product weight	
US AC cord model	2.5 lbs (1.1 kg)
US AC conduit model.....	2.5 lbs (1.1 kg)
Regulatory compliance.....	CE, c-UL, UL, RoHs, and WEEE
Product warranty	3 years parts and labor

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.

4290-D1