

Specifications

Cable Cubby® 100


Contact closure – switch kit only

Quantity/type	(1) normally-open single pole, single throw switch
Connectors	(1) 4 pole, 3.5 mm captive screw connector on 4" pigtail
Contact rating	2 A @ 36 VDC, 1 A @ 125 VAC
LED voltage input.....	5 VDC
LED color	Blue

NOTE: See the Cable Cubby 100 Switch Kit Installation Guide for details.

General

Power output	
US AC Power Model	125 VAC, 50-60 Hz. 12 A max
Non-US AC Power Model.....	240 VAC, 50-60 Hz, 10 A max
USB power model	5 VDC, 2.1 A, 10.5 watts total
Power supply	
USB power model	External
	Input: 100-240 VAC, 50-60 Hz
	Output: 12 VDC, 1 A
Power consumption	
USB power model	
Device and power supply...	13.2 watts
Thermal dissipation	
USB power model	
Device	2.7 BTU/hr
Device and power supply...	10.7 BTU/hr
Mounting	
Furniture mount	Yes, mounts on top of furniture surface
Enclosure type	Metal enclosure, plastic top bezel
Enclosure dimensions	
Top bezel plate (outer rim).....	5.20" (132.1 mm) diameter circle
Surface cutout (inside rim)	4.00" (102.0 mm) diameter circle
Enclosure (under surface)	2.70" H x 2.80" W x 3.48" L (68.6 mm H x 71.1 mm W x 88.4 mm L)

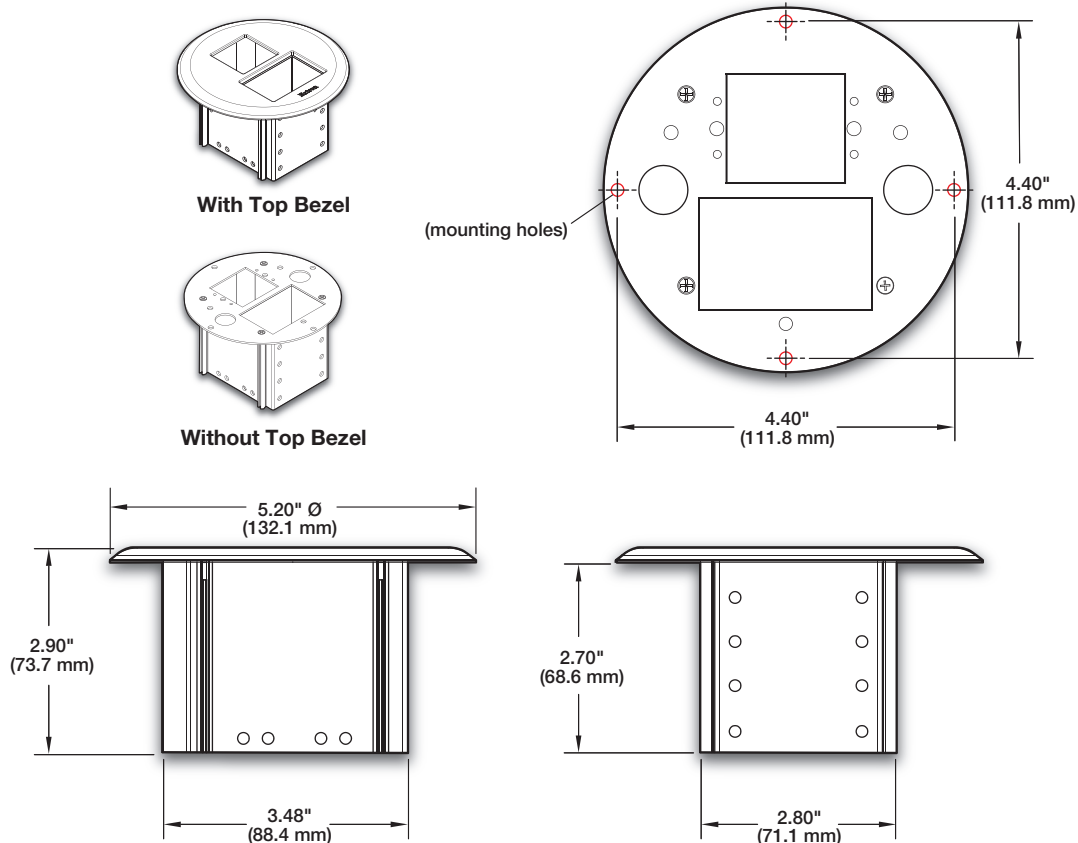

Product weight

Enclosure only	1.0 lbs (0.5 kg)
With US AC Module	2.0 lbs (0.9 kg)
With Non-US AC Module.....	1.3 lbs (0.6 kg)
With USB power module	1.5 lbs (0.7 kg)
Switch kit only	0.2 lbs (0.9 kg)

Vibration ISTA 1A in carton (International Safe Transit Association)

Regulatory compliance

EMI/EMC (USB power model only)	CE, C-tick, FCC Class A, ICES, VCCI Class A
Environmental.....	Complies with the appropriate requirements of RoHS, WEEE
Safety (US and USB models)...	CE, UL, c-UL
Safety (non-US models).....	CE

Warranty 3 years parts and labor

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.

3750-121316-D4