


Specifications

One HDMI Female to One HDMI Female on 10" pigtail, One Contact Closure Switch to Captive Screw on 4" Pigtail AAP

TRUE 4K

General

Mounting	Mounts to AAP frames
Connector type	1 contact closure switch to 1 5-pole captive screw connector on a 4" pigtail cable 1 HDMI female to 1 HDMI female on a 10" pigtail cable
Resolution range	HDMI cable: Up to 4K @ 60 Hz (4096x2160) or UHD @ 60 Hz (3840x2160) 8 bit color depth max. 18.0 Gbps data rate
Enclosure dimensions	
Faceplate	0.69" H x 3.50" W x 0.05" D (17 mm H x 89 mm W x 1.2 mm D)
Enclosure/connectors	Allow 2.00" (51 mm) depth for cable management.

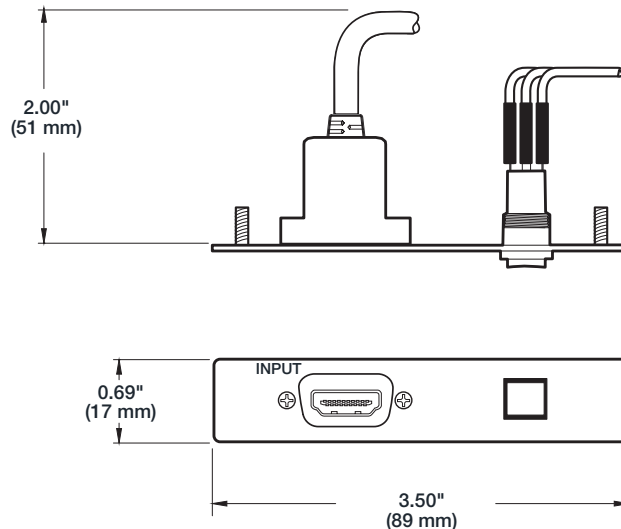

Material	Metal
Product weight	0.33 lb (0.15 kg)
Vibration	ISTA 1A in carton (International Safe Transit Association)
Regulatory compliance	
Environmental	Complies with the appropriate requirements of RoHS, WEEE
Warranty	3 years parts and labor

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.